



DATA SHEET

DT35-B15251-KFJDHHFPD-KK7382FJS7U

Dx35
Time-of-flight sensors

SICK

Sensor Intelligence



TIME-OF-FLIGHT SENSORS

DT35-B15251-KFJDHHFPD-KK7382FJS7U

ORDERING INFORMATION

Type	part no.
DT35-B15251-KFJDHHFPDKK7382FJS7U	1139908

Further device versions and accessories at www.sick.com/Dx35



DETAILED TECHNICAL DATA

FEATURES

Measuring range	50 mm ... 12,000 mm, 90% remission factor ^{1) 2)} 50 mm ... 5,300 mm, 18% reflection factor 50 mm ... 3,100 mm, 6% remission factor
Target	Natural objects
Resolution	100 µm
Repeatability	≥ 0.5 mm ^{2) 3) 4)}
Measurement accuracy	Typ. ± 10 mm ⁴⁾
Response time	96.5 ms
Switching frequency	6 Hz
Output time	32 ms
Emitted beam	Light source Laser, red ⁵⁾ Type of light Visible red light Typ. light spot size (distance) 15 mm x 15 mm (at 2 m)
Key laser figures	Normative reference IEC 60825-1:2014, EN 60825-1:2014 Laser class 2 ⁶⁾ Average laser service life (at 25 °C) 100,000 h
Additional function	Set speed: Super Fast ... Super Slow Teach-in of analog output and invertible analog output Output Q ₂ adaptable: Current output / Voltage output / Digital output Switching mode: Distance to Object (DtO) / switching window / object between sensor and background (ObSB)

¹⁾ For speed setting Slow.
²⁾ See repeatability characteristic lines.
³⁾ Equivalent to 1 σ.
⁴⁾ 6% ... 90% remission factor.
⁵⁾ Wavelength: 658 nm; max. output: 250 mW; pulse duration: 4 ns; duty cycle: 1/250.
⁶⁾ Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

		Teach-in of digital output and digital output invertible Multifunctional input: laser off / external teach / deactivated Reset to factory default
Safety-related parameters	MTTF _D DC _{avg}	101 years 0%

¹⁾ For speed setting Slow.

²⁾ See repeatability characteristic lines.

³⁾ Equivalent to 1 σ .

⁴⁾ 6% ... 90% remission factor.

⁵⁾ Wavelength: 658 nm; max. output: 250 mW; pulse duration: 4 ns; duty cycle: 1/250.

⁶⁾ Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

INTERFACES

IO-Link	Function Data transmission rate	✓, IO-Link V1.1 Process data, parameterization, diagnosis 38.4 kbit/s
Digital output	Number Type Function Maximum output current I _A	1 ... 2 ^{1) 2)} Push-pull: PNP/NPN Output Q ₂ adaptable: Current output / Voltage output / Digital output ≤ 100 mA
Analog output	Number Type Function Current Voltage Resolution	1 Current output / voltage output Output Q ₂ adaptable: Current output / Voltage output / Digital output 4 mA ... 20 mA, ≤ 450 Ω 0 V ... 10 V, ≥ 50,000 Ω 12 bit
Multifunctional input (MF)		1 x ³⁾
Hysteresis		0 mm ... 11,950 mm ⁴⁾

¹⁾ Output Q short-circuit protected.

²⁾ Voltage drop < 3 V.

³⁾ Response time ≤ 60 ms.

⁴⁾ Configurable via IO-Link.

ELECTRONICS

Supply voltage U _B	DC 12 V ... 30 V ^{1) 2)}
Power consumption	≤ 1.7 W ³⁾
Ripple	≤ 5 V _{pp} ⁴⁾
Initialization time	≤ 500 ms
Warm-up time	≤ 20 min
Display	LEDs
Enclosure rating	IP65 IP67

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ When using IO-Link output V_s > 18 V. When using analog voltage output V_s > 13 V.

³⁾ Without load, at +20 °C.

⁴⁾ May not fall short of or exceed V_s tolerances.

TIME-OF-FLIGHT SENSORS - DT35-B15251-KFJDHHFPDKK7382FJS7U

Protection class	III
Connection type	Male connector, M12, 5-pin

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ When using IO-Link output $V_s > 18$ V. When using analog voltage output $V_s > 13$ V.

³⁾ Without load, at +20 °C.

⁴⁾ May not fall short of or exceed V_s tolerances.

MECHANICS

Dimensions (W x H x D)	32 mm x 58.67 mm x 42.7 mm
Housing material	Plastic (ABS/PC)
Window material	Plastic (PMMA)
Weight	65 g

AMBIENT DATA


Ambient temperature, operation	-30 °C ... +55 °C, $U_v \leq 24$ V
Ambient temperature, storage	-40 °C ... +75 °C
Max. rel. humidity (not condensing)	≤ 95 %
Typ. Ambient light immunity	40 klx
Vibration resistance	EN 60068-2-6, EN 60068-2-64
Shock resistance	EN 60068-2-27
Electromagnetic compatibility (EMC)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4 ¹⁾

¹⁾ This is a Class A device. This device can cause radio interference in living quarters.

CERTIFICATES

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
cTUVus certificate	✓
Information according to Art. 3 of Data Act (Regulation EU 2023/2854)	✓


DIMENSIONAL DRAWING

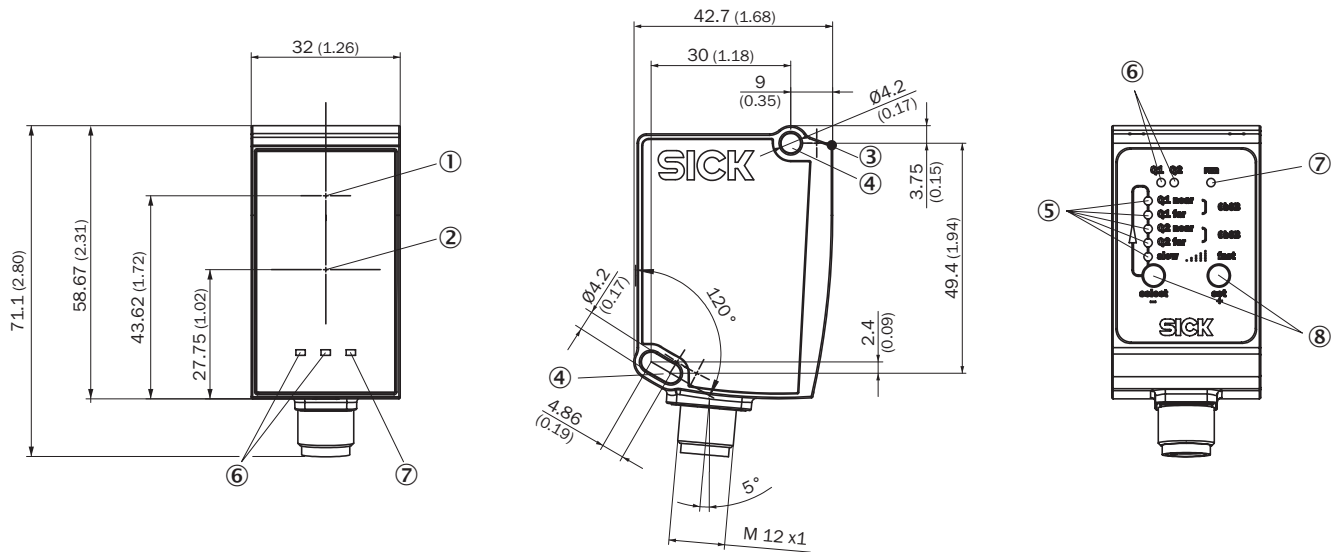


Dimensions in mm (inch)

- ① Optical axis, sender
- ② Optical axis, receiver
- ③ Zero level
- ④ Mounting hole M4
- ⑤ status indicator output Qa/Q2
- ⑥ Status LEDs output Q₁
- ⑦ Operating indicator
- ⑧ Control elements

CONNECTION TYPE PLUG, M12, 5-PIN




CONNECTION DIAGRAM



- ① Multifunctional input (MF)


CHARACTERISTIC CURVE 1) SUPER SLOW

Super Slow

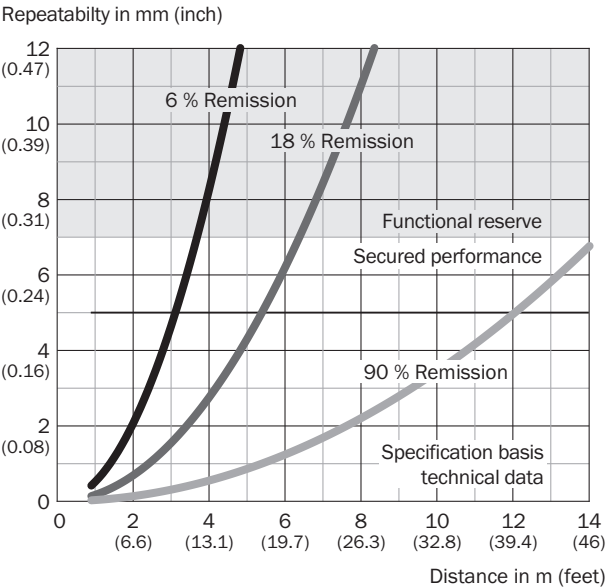


CHARACTERISTIC CURVE 5) SUPER FAST

Super Fast

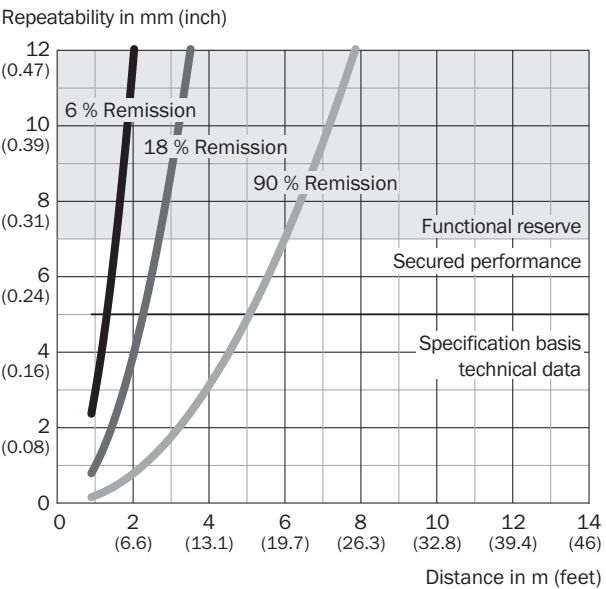


CHARACTERISTIC CURVE 2) SLOW

Slow

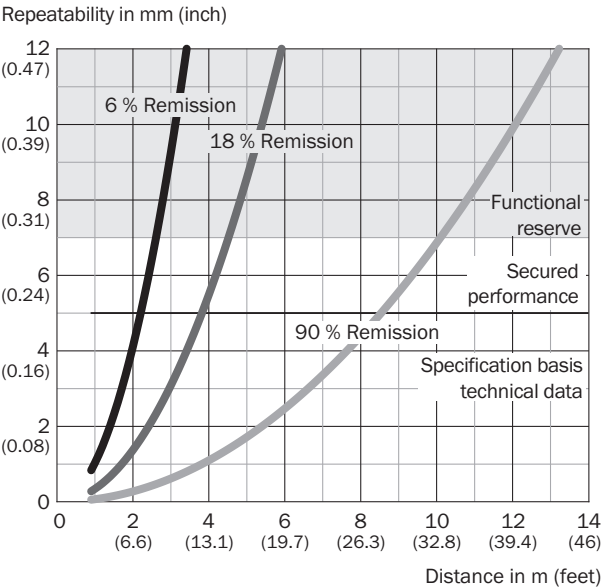


CHARACTERISTIC CURVE 3) MEDIUM

Medium

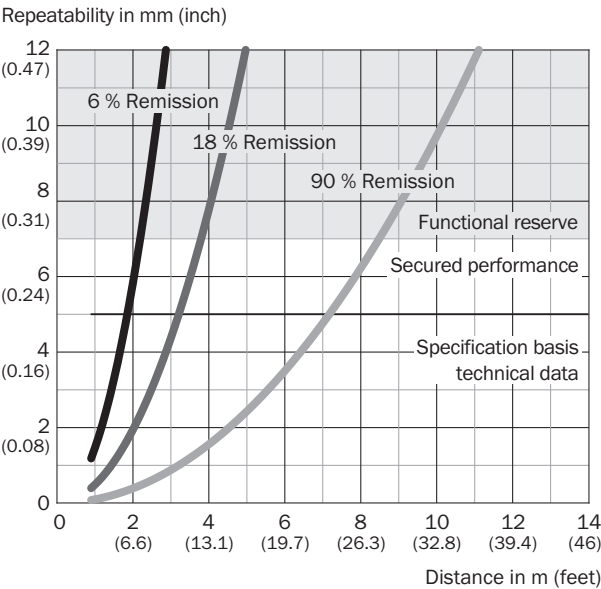

CHARACTERISTIC CURVE 4) FAST

Fast

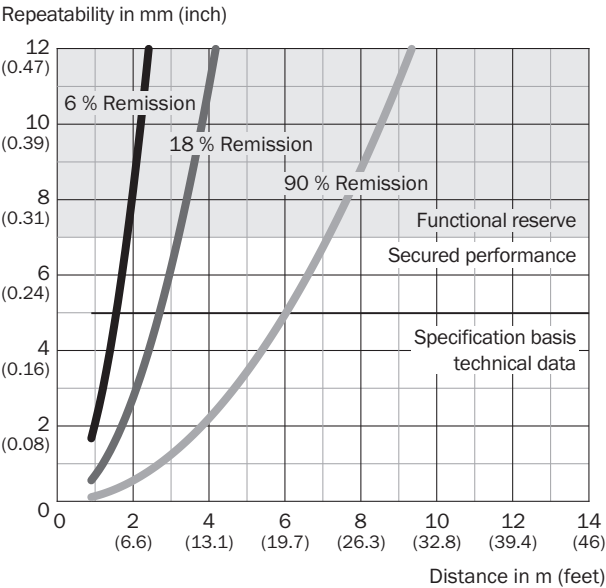

Further information as well as suitable accessories, example applications and downloads such as CAD di-
mensional models, operating instructions and software can be found at www.sick.com/1139908



SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK
Sensor Intelligence