


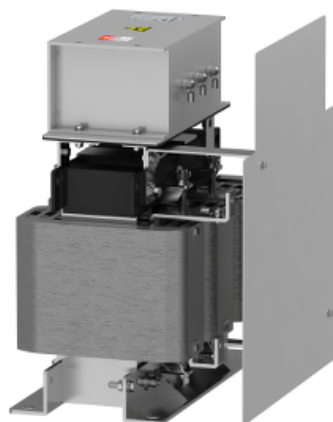

Main

Product or component type	Sinus filter
Range compatibility	Altivar Process ATV600 Altivar Process ATV900
Product specific application	Output filter

Complementary

Motor cable length	<= 1000 m unshielded cable <= 500 m shielded cable
[In] rated current	180 A
Thermal losses	411 W at 4 kHz
Product compatibility	Variable speed drive ATV630 wall mount, motor: 55 kW, 380...480 V Variable speed drive ATV630 wall mount, motor: 30 kW, 200...240 V Variable speed drive ATV630 wall mount, motor: 37 kW, 200...240 V Variable speed drive ATV650 wall mount, motor: 55 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 55 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 30 kW, 200...240 V Variable speed drive ATV930 wall mount, motor: 37 kW, 200...240 V Variable speed drive ATV950 wall mount, motor: 55 kW, 380...480 V Variable speed drive ATV630 wall mount, motor: 75 kW, 380...480 V Variable speed drive ATV630 wall mount, motor: 90 kW, 380...480 V Variable speed drive ATV630 wall mount, motor: 45 kW, 200...240 V Variable speed drive ATV650 wall mount, motor: 75 kW, 380...480 V Variable speed drive ATV650 wall mount, motor: 90 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 75 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 90 kW, 380...480 V Variable speed drive ATV930 wall mount, motor: 45 kW, 200...240 V Variable speed drive ATV950 wall mount, motor: 75 kW, 380...480 V Variable speed drive ATV950 wall mount, motor: 90 kW, 380...480 V
Electrical connection	Copper bar M10
Operating altitude	1000...4000 m with current derating 1 % per 100 m <= 1000 m without current derating
Switching frequency	2...8 kHz
Output frequency	<= 100 Hz
Voltage drop at rated load	< 8 %
Permissible voltage	<= 480 V AC
Max current	1.20 x nominal current for 60 s
Width	430 mm

Height	325 mm
Depth	495 mm
Product weight	90 kg

Environment

IP degree of protection	IP00
Environmental characteristic	Biological pollution resistance class 3B1 conforming to IEC 60721-3-3 Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to IEC 60721-3-3
Pollution degree	3 conforming to IEC 61800-5-1
Relative humidity	5...95 % without condensation
Ambient air temperature for operation	50...60 °C with current derating 1.5 % per °C -15...50 °C without current derating
Ambient air temperature for storage	-40...70 °C
Mechanical robustness	Shocks conforming to IEC 60721-3-3 class 3M4 Vibrations conforming to IEC 60721-3-3 class 3M4

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1433 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
------------------------	---