



Main

Product or component type	Braking resistor
---------------------------	------------------

Complementary

Range compatibility	Altivar Process ATV900
Product compatibility	Variable speed drive ATV930 wall mount 110 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 132 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 160 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 30 kW 200...240 V light cycle Variable speed drive ATV930 wall mount 37 kW 200...240 V light cycle Variable speed drive ATV930 wall mount 45 kW 200...240 V light cycle Variable speed drive ATV930 wall mount 30 kW 200...240 V medium cycle Variable speed drive ATV930 wall mount 37 kW 200...240 V medium cycle Variable speed drive ATV930 wall mount 45 kW 200...240 V medium cycle Variable speed drive ATV930 wall mount 310 kW 380...480 V light cycle 2 per drive
Duty cycle	Light cycle (heavy duty) : ≤ 0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) : ≤ 0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) : ≤ 4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) : ≤ 4 s braking with 165 % braking torque for a 40 s cycle
Average power available	3.2 kW at 50 °C
Ohmic value	2.5 Ohm
Electrical connection	Terminal, clamping capacity: ≤ 2.5 mm ² , AWG 12 for temperature control switch M12 bar wire for drive
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	540 mm
Height	485 mm
Depth	450 mm
Product weight	21 kg

Environment


ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...70 °C
IP degree of protection	IP23

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1533 - Schneider Electric declaration of conformity

Dimensions

Right Side and Front View

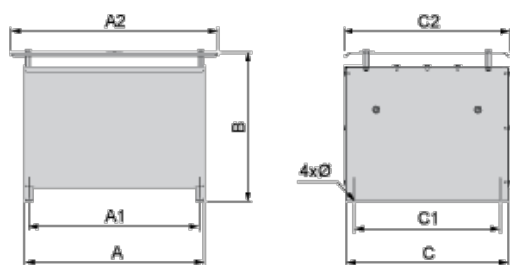

Dimensions in mm


A	B	C	A1	C1	A2	C2	Ø
330	485	485	310	380	450	540	9 x 12

Dimensions in in.

A	B	C	A1	C1	A2	C2	Ø
12.99	19.09	19.09	12.20	14.96	17.71	21.26	0.35 x 0.47


Clearances

mm
in.

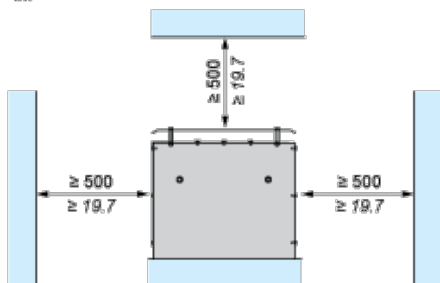

Recommended Schema

1 Braking Resistor



A1 : Drive or external braking unit

A2 : Braking resistor


PA, Bus DC

PB :

T1, Temperature control switch

T2 :

2 Braking Resistors

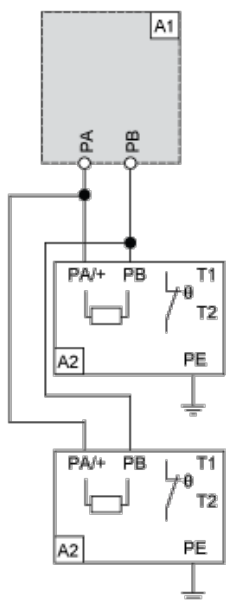

A1 : Drive or external braking unit

A2 : Braking resistor

PA, Bus DC

PB :

T1, Temperature control switch

T2 :